

AD-A127 457


HYDROGEN AND OXYGEN FROM WATER VI QUENCHING THE
EFFLUENT FROM A SOLAR FUR. (U) MINNESOTA UNIV
MINNEAPOLIS DEPT OF MECHANICAL ENGINEERING
R B DIVER ET AL. 15 APR 83 TR-3


1/1

UNCLASSIFIED

F/G 7/2

NL

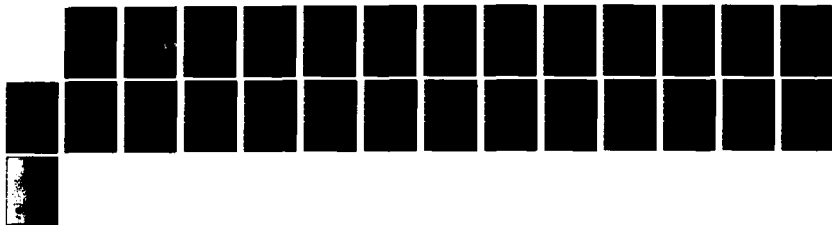



MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

AD A127457

OFFICE OF NAVAL RESEARCH

Contract N00014-82-K-0523

TECHNICAL REPORT NO. 3

Hydrogen and Oxygen from Water VI.
Quenching the Effluent from a Solar Furnace

by

Richard B. Diver, Stephen Pederson, Todd Kappauf,
and Edward A. Fletcher

Prepared for Publication
in
Energy

University of Minnesota
Mechanical Engineering Department
111 Church Street S. E.
Minneapolis, MN 55455

April 15, 1983

Reproduction in whole or in part is permitted for
any purpose of the United States Government

This document has been approved for public release
and sale; its distribution is unlimited

DTIC

SELECTED

APR 20 1983

H

DTIC FILE COPY

83 04 26 120

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER TR-3	2. GOVT ACCESSION NO. AD-A127 457	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) Hydrogen and Oxygen from Water VI. Quenching the Effluent from a Solar Furnace		5. TYPE OF REPORT & PERIOD COVERED Technical Report, Interim July 1, 1982 - Oct. 31, 1984
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) Richard B. Diver, Stephen Pederson, Todd Kappauf, and Edward A. Fletcher		8. CONTRACT OR GRANT NUMBER(s) N00014-82-K-0523
9. PERFORMING ORGANIZATION NAME AND ADDRESS Edward A. Fletcher, Dept. of Mechanical Engng. University of Minnesota, 111 Church St. S. E. Minneapolis, MN 55455		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS NR 625-830 NR 359-830X
11. CONTROLLING OFFICE NAME AND ADDRESS 612A:BAR Office of Naval Research, Dept. of the Navy 800 North Quincy St., Arlington, VA 22217		12. REPORT DATE April 15, 1983
		13. NUMBER OF PAGES 24
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) Director, Office of Naval Research Detachment, Chicago 536 South Clark Street, Chicago, IL 60605		15. SECURITY CLASS. (of this report) Unclassified
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) This document has been approved for public release and sale; its distribution is unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report) To be published in <u>Energy</u>		
18. SUPPLEMENTARY NOTES To be published in <u>Energy</u>		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) hydrogen, solar, water splitting, thermochemical		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) <u>Abstract</u> —Numerical integration of a set of rate equations applicable to the hydrogen-oxygen system suggests that it should be possible to recover H ₂ and O ₂ by rapid cooling of low-pressure equilibrium mixtures from a solar furnace. Using the University of Minnesota 4.2 m solar furnace, we were able to recover explosive mixtures of H ₂ and O ₂ from water which had been heated to about 2100K. The numerical calculations and the experiment are described.		

DD FORM 1 JAN 73 1473

EDITION OF 1 NOV 65 IS OBSOLETE
S/N 0102-LF-014-6601

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

HYDROGEN AND OXYGEN FROM WATER VI.
QUENCHING THE EFFLUENT FROM A SOLAR FURNACE


Richard B. Diver, Stephen Pederson, Todd Kappauf,
and Edward A. Fletcher[†]

Department of Mechanical Engineering
University of Minnesota
111 Church Street S.E.
Minneapolis, MN 55455, U.S.A.

(Received February 8, 1983)

Abstract-- Numerical integration of a set of rate equations applicable to the hydrogen-oxygen system suggests that it should be possible to recover H_2 and O_2 by rapid cooling of low-pressure equilibrium mixtures from a solar furnace. Using the University of Minnesota 4.2 m solar furnace, we were able to recover explosive mixtures of H_2 and O_2 from water which had been heated to about 2100K. The numerical calculations and the experiment are described.

[†]To whom correspondence should be addressed.



Accession For	
NTIS GRA&I	<input checked="checked" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By _____	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A	

INTRODUCTION

The use of sunlight for the production of H_2 and O_2 in a one-step thermochemical process is of current interest.¹⁻⁷ Bilgen⁸ and his coworkers have conducted analytical and experimental studies and have concerned themselves with the possibility of quenching hot equilibrium products. A group at Los Alamos⁹ considered quenching and concluded that it could not be done. Lede, Lapique, and Villiermaux¹⁰ concluded that equilibrium was quickly established when H_2O was heated. They also observed quenching in several types of zirconia nozzles and other devices when turbulent cold jets were injected into the streams which emerged from the focus of an arc image furnace. Our analytical studies¹¹⁻¹⁵ have emphasized our interest in high-temperature separation rather than quenching. We have presumed that quenched mixtures, even those in which a substantial measure of high-temperature separation has been achieved, should be avoided, at least until we are assured that they can be safely handled.

Quenched mixtures, from which most of the H_2O has been removed, would be brisantly explosive over a wide range of compositions.^{16,17} Our concern with the possibility that our experimental work might produce hazardous mixtures prompted us, some time ago, to do numerical calculations of the rates of reactions which would be of interest to us.^{18,19} Our analytical studies suggested that, under some conditions, dangerous mixtures might, indeed, be produced even in partially separated mixtures. But, in view of the fact that our kinetics program limited the number of concurrent reactions we could handle to thirty, we deferred

publication of our results as a kinetic study. Inasmuch as we have now observed water quenching in a solar reactor, we believe they are of interest to the water-splitting community.

We recently built a solar furnace which can produce, in cavity receivers, temperatures at which the dissociation of H_2O becomes appreciable.²⁰ We are conducting developmental studies of a reactor-separator which will be used to study effusional separation in the Knudsen flow regime. It is too soon for us to have reached definite conclusions about the effusional technique. But, since quenching is of interest, we believe that some of our observations should be published now, especially inasmuch as some of the cooled products which emerge from our solar furnace are explosive.

THE KINETICS OF THE QUENCH REACTION

Oran, Young, and Boris²¹ compiled an excellent set of rate constants for use with the H_2 - O_2 system. It consists of 43 reactions involving the species H , H_2 , O , OH , H_2O , O_2 , HO_2 , and H_2O_2 . We used their rate constants in a computer program developed by Bittker and Scullin²² to gain insights into the likelihood that our furnace might produce hazardous mixtures.

We found it necessary to eliminate some of the reactions of Ref. 21, since our computer program could handle only 30 simultaneous rate expressions. Even so, our results are adequate for the purpose for which they were intended, namely, to alert us to hazards.

We arbitrarily chose to eliminate all reactions involving H_2O_2 , leaving 34. We then did two sets of preliminary calculations, one in which HO_2 was not included and a second in which HO_2 was included, but in which the four slowest reactions in the set were excluded. There was a significant difference in the results, shown in Fig. 1. Thereafter, we included HO_2 and used the 30 fastest reactions in our reaction scheme.

Our primary interest is in whether the cooled effluent from a solar reactor-separator such as those we have described previously¹¹⁻¹⁴ would be explosive. We therefore concerned ourselves with the behavior of hydrogen-rich and oxygen-rich equilibrium mixtures such as those one might expect from an effusional separation process. Our examples thus yield mixtures that are probably safer than those which would be obtained in processes which quench without prior separation.

We did a series of calculations in which the equilibrium compositions at 2500K, shown in Table 1, were instantly cooled to lower temperatures. The hydrogen-rich mixtures have an H/O atom ratio of 2.2. Their pressure is a constant 0.01 atm. The oxygen-rich mixtures have an H/O atom ratio of 1.8. Their pressure is 0.04 atm. Starting with the compositions of Table 1, we integrated the rate expressions, using a very small time interval for one millisecond. After we had established the trends in the composition profiles, we continued the integration for one additional second, using a larger integration interval to save computer time. Details of the calculation can be found elsewhere.¹⁹ We

assumed that the compositions after 1.001 second would be indicative, of the amount of H_2O , H_2 , and O_2 that would be found in the quenched product.

An example result is shown in Fig. 2. Table 2 summarizes the results of many such calculations. Section a of Table 2 deals with oxygen-rich mixtures such as those one might expect from the uneffused fraction from a reactor-separator at 2500K; section b deals with the hydrogen-rich effusate. The first part of each section gives the mole fractions of the major products after 1.001 s at the quench temperature. The second part gives the mole fractions of the components that would be found in the cool product if the mass of H_2O did not change after 1.001 s and the remaining species recombined in such a way as to be completely converted into H_2 and O_2 . The third part gives the mole fractions of hydrogen that would be found in the H_2 - O_2 mixtures retrieved after liquid H_2O has been removed. The fourth part gives the components that would be retrieved if the fate of all oxygen bound to hydrogen either in H_2O or OH is to be found, ultimately, in water. The fifth part of each section gives the mole fraction of H_2 in the H_2 - O_2 gaseous mixture that remains after the H_2O has been condensed from it. Mixtures having mole fractions of hydrogen between 0.15 and 0.90 are detonable;¹⁶ they are explosive over an even broader composition range, 0.047-0.939.¹⁷ Researchers working with them should be aware of the possible danger. Explosive compositions are printed in bold type in Table 2.

EXPERIMENTAL PART

Apparatus

Our solar furnace has been described elsewhere.²⁰ A schematic diagram of the apparatus is shown in Fig. 3. The reactor was a cavity receiver with a 4.45-cm aperture. It was equipped with an H₂O metering system which fed liquid H₂O to a bank of Lennox Model LSC18 flat-plate collectors to prevaporize it at low pressure, a water cooled heat-exchanger, pressure-regulator, and pump, at the exit of which the effluent gas was conducted through a Tygon hose to a large beaker, half-filled-with-water, through which the effluent was permitted to bubble to the atmosphere. From time to time, small samples were collected in beakers or graduated cylinders by downward displacement of water, to measure flow rates and to test them for explosiveness.

The actual concentration ratio, measured calorimetrically, was 4400. The average energy flux at the aperture, with a solar intensity of 700 W/m², was about 3080 kW/m². The power to the receiver was therefore about 4.9 kW.

Figure 4 shows a cross-section through the reactor. We made it by wrapping a 6.5 cm thick inner layer of yttria-stabilized zirconia, Zircar ZYF-100 felt, around a mandrel to shape the reactor cavity. We then wrapped the zirconia inner chamber in a 4 cm thick outer insulating layer of alumina-silica paper, Fiberfrax series 970 JH. The resulting refractory cavity receiver was encased in Inconel 600, which made the assembly vacuum

tight and provided the means by which the chamber was connected with the 4.75 cm Inconel feed- and product-lines.

The window was a shallow quartz dome. It was made hemispherical for strength and to minimize refraction of the sunlight passing through it from the concentrator. It was held in place on the highly polished front plate of the reactor housing by the vacuum in the reactor. A thin strip of Teflon provided the seal.

To improve heat transfer to the H_2O , as well as to learn how a thin zirconia membrane might be expected to behave in such an environment, we supported a thin sheet of zirconia felt on a dense zirconia honeycomb, as shown in Fig. 4, and required the H_2O to flow through it. The membrane thus served as a significant absorber of sunlight as well as a heat exchanger to heat the H_2O .

Procedure and Results

With all the components in place, pump working, and the system evacuated, we gradually increased the furnace power by opening the two large doors which serve as the furnace's shutter. After about five minutes at full power, we permitted H_2O to flow into the system through the inlet valve, whose setting was not changed again during the course of an experiment.

We measured, at convenient intervals, incident flux, cavity temperature, pressure, and the gas delivery rate at the pump exit. After one hour, the feedwater supply was shut off. Measurements of the remaining experimental variables continued for an

additional 25 minutes. Then the furnace doors were closed and the experiment terminated.

Figure 5 is a summary of our experimental observations. The solar intensity peaked near noon, near the start of our experiment, at about 700 W/m^2 and decreased, gradually, to about 650 W/m^2 by the end of it at about 13:40 local time. The temperature of our receiver rose rapidly after the doors were opened, to about 2100K. When the feedwater was turned on the temperature dropped slightly, and then continued its rise, reaching its highest value, about 2150K, at about 12:45. Thereafter the trend in temperature was generally downward, but, after the H_2O supply had been turned off near the end of the experiment, it started upward again. The pressure in the system rose continuously as H_2O was being fed to it, and started to decrease when the H_2O supply was turned off; the behavior of the system was what one would expect of a system with a large capacity and long characteristic fill and pump-down times. The gas production rate shown on the figure, actually the pumping rate, correlated well with the pressure. The gas is presumed to have been a stoichiometric $\text{H}_2\text{-O}_2$ mixture. The bubbles and samples we collected over water exploded noisily upon being ignited by small flames.

DISCUSSION

During the course of the experiment, 106 moles of water was fed to the system. At the conclusion of the experiment, about half of it was recovered where it had condensed in the feed lines. The ambient temperature was about 270K. The total gas pro-

duction, measured by integration of the gas flow rate shown in Fig. 5, was 0.35 moles, the product from 0.24 moles of H_2O . The fraction of the water which was recovered as H_2 and O_2 after having been passed through the reactor was 0.0045.

Table 3 gives the equilibrium composition of water at 2125K and 0.02 atm, a state which is representative of that of the reactor during the course of the experiment. The first column of the second section of Table 3 gives the mole fractions of the quenched products if the amount of water does not change at all during the quench process; the second gives the mole fractions of the quenched products if all the oxygen which is bonded to hydrogen is ultimately found in water. The third section of Table 3 gives the fraction of the water that would have been split in a perfect quench from 2125K according to the two schemes. The maximum yield, for a perfect quench, would thus correspond to a splitting of 0.038 to 0.047 of the feedwater. Our experiment thus yielded a split, achieved by quenching, of between 0.10 and 0.12 of the very best that might have been expected.

CONCLUDING REMARKS

Quenched mixtures of H_2 and O_2 , especially those from which most of the H_2O has been condensed, could be brisantly explosive over an extremely wide range of compositions. We have observed that such mixtures can be produced by quenching the effluent from a solar furnace operating in the temperature range 2075-2150K at low pressures, of the order 0.01-0.02 atm. At higher pressures, the degree of quenching might be substantially less. Neverthe-

less, it would appear that quenching offers possibilities which deserve further exploration. However one conducting such studies should take appropriate precautions, especially when dealing with gaseous products from which H_2O has been removed.

Some time ago, Reppe²³ was able to develop techniques for handling acetylene at high pressures, although it is unstable and detonable, by making use of capillary tubes as reactors to quench incipient explosive reactions. Perhaps a similar approach might be used to safeguard H_2-O_2 mixtures as they are being separated by the appropriate low-temperature membranes.

Acknowledgement-- We would like to thank the Northern States Power Company for the gift of the flat solar collectors, and D. Bittker, V. Scullin, and K. Teichman for their help with the computer program. We were supported, in part, by grants from the Office of Naval Research, Contract N00014-82-k-0523, and by the Department of Energy, Contract DE-AC02-82ER12089.A000 during the period of this research. We are grateful for this support.

REFERENCES

1. N.C. Ford, "Analysis of a System to Thermally Dissociate Water Using a Semi-Permeable Membrane," U.S. ERDA Contract W-31-109-Eng-38, NTIS Rep. ANL-75-65, Sept. 1975.
2. T. Ohta and T. N. Veziroglu, Int. J. Hydrogen Energy 1, 255 (1976).
3. T. Nakamura, Solar Energy 19, 467 (1977).
4. S. Ihara, Int. J. Hydrogen Energy 3, 287 (1978).
5. S. Ihara, Int. J. Hydrogen Energy 4, 226 (1979).
6. S. Ihara, Int. J. Hydrogen Energy 5, 527 (1980).
7. P. Genequand, "Direct Thermal Water Splitting by Concentrated Solar Radiation for Hydrogen Production," Final Report, Battelle, Geneva Research Centers, 7 route de Drize, 1227 Carouge-Geneva, Switzerland.
8. E. Bilgen, M. Ducarroir, M. Foex, F. Sibieude, and F. Trombe, Int. J. Hydrogen Energy 2, 251 (1977).
9. M. G. Bowman, Proceedings of the Annual Meeting, Solar Thermal Test Facilities Users Association, 209 (1980).
10. J. Lede, F. Lapique, and J. Villiermaux, 4th World Hydrogen Energy Conference, June 1982.
11. E. A. Fletcher and R. L. Moen, Science 197, 1050 (1977).
12. R. B. Diver and E. A. Fletcher, Energy 4, 1139 (1979).

13. R. B. Diver and E. A. Fletcher, Energy 5, 597 (1980).
14. R. B. Diver and E. A. Fletcher, Energy 5, 1261 (1980).
15. J. E. Noring, R. B. Diver, and E. A. Fletcher, Energy 6, 109 (1981).
16. I. L. Drell and F. E. Belles, NACA Report 1383, "Survey of Hydrogen Combustion Properties," p. 19, NACA, Washington, D.C. (1958).
17. G.W. Jones and R.E. Kennedy, U.S. Bur. Mines Repts. Invest. No. 3337, U.S. Bureau of Mines, Pittsburgh, PA (1937).
18. K. Barnes, and E. A. Fletcher, University of Minnesota, unpublished work (1977).
19. S. E. Pederson, "Analysis of Flammability Hazard in the Effusional Separation of Hydrogen and Oxygen from Water," MS Thesis, University of Minnesota, Minneapolis, MN (1980).
20. R. B. Diver, D. E. E. Carlson, F. J. Macdonald, and E. A. Fletcher, "A New High Temperature Solar Research Furnace," J. Solar Energy Engineering, in press (1983).
21. E. Oran, T. Young, and J. Boris, "Application of Time-Dependent Numerical Methods to the Description of Reactive Shocks," in Seventeenth Symposium (International) on Combustion, p. 47, The Combustion Institute, Union Trust Building, Pittsburgh, Pennsylvania 15219 (1979).

22. D. A. Bittker and V. J. Scullin, "General Chemical Kinetics Computer Program for Static and Flow Reactions with Applications to Combustion and Shock-Tube Kinetics," NASA TN D-6586, National Aeronautics and Space Administration, Washington, D.C. (1972).

23. W. Reppe, Chemie und Technik der Acetylen-Druck-Reaktionen, Verlag Chem., Weinheim, F.R.G. (1951).

Table 1. Mole Fractions of the Components of the Equilibrium Mixtures at 2500K. Although HO_2 is included in rate calculations, it is not included in the table because its mole fraction is $<10^{-7}$

Species	H/O = 1.8, P = 0.04 atm	H/O = 2.2, P = 0.01 atm
H	0.0360	0.1044
H ₂	0.0820	0.1726
H ₂ O	0.7295	0.5840
OH	0.0590	0.0651
O	0.0210	0.0319
O ₂	0.0725	0.0419

Table 2.a Mole Fractions of Components

Oxygen Rich Mixtures, H/O = 1.8, P = 0.04 atm.

T _{quench}	2400	2000	1600	1200	800
After 1.001 sec					
H	0.0205	0.0008	< 0.0001	< 0.0001	< 0.0001
H ₂	0.0592	0.0070	0.0006	0.0007	0.0002
H ₂ O	0.7929	0.9293	0.9467	0.9460	0.9483
OH	0.0497	0.0101	0.0017	0.0007	< 0.0001
O	0.0115	0.0009	< 0.0001	< 0.0001	< 0.0001
O ₂	0.0662	0.0518	0.0508	0.0524	0.0515
HO ₂ x10 ⁵	0.301	0.0616	0.0068	0.0046	0.0083
With H ₂ O content frozen at 1.001 sec value and condensed to recombine remainder to H ₂ and O ₂					
H ₂ O (l)	0.8058	0.9301	0.9468	0.9461	0.9483
H ₂ (g)	0.0958	0.0125	0.0015	0.0011	0.0002
O ₂ (g)	0.0984	0.0574	0.0517	0.0528	0.0515
H ₂ in gas mixt	0.4933	0.1789	0.0279	0.0203	0.0040
With H ₂ O content determined by OH and H ₂ O content after 1.001 sec.					
H ₂ O (l)	0.8784	0.9449	0.9490	0.9471	0.9484
H ₂ (g)	0.0465	0.0024	---	0.0004	0.0002
O ₂ (g)	0.0751	0.0526	0.0510	0.0525	0.0515
H ₂ in gas mixt	0.383	0.044	---	0.007	0.003

Table 2.b Mole Fractions of Components
Hydrogen Rich Mixtures, $H/O = 2.2$, $P = 0.01$ atm.

T_{quench}	2400	2000	1600	1200	800
After 1.001 sec					
H	0.0696	0.0286	0.0407	0.0536	0.0769
H ₂	0.1519	0.1105	0.1049	0.0886	0.0644
H ₂ O	0.6762	0.8240	0.8249	0.8448	0.8517
OH	0.0549	0.0202	0.0118	0.0004	0.0003
O	0.0165	0.0041	0.0039	0.0003	0.0006
O ₂	0.0309	0.0126	0.0138	0.0124	0.0060
HO ₂ × 10 ⁵	0.1058	0.0111	0.0022	0.0006	0.0002
With H ₂ O content frozen at 1.001 msec value and condensed to recombine remainder to H ₂ and O ₂					
H ₂ O (l)	0.7066	0.8377	0.8437	0.8682	0.8861
H ₂ (g)	0.2238	0.1372	0.1342	0.1188	0.1072
O ₂ (g)	0.0696	0.0251	0.0211	0.0131	0.0068
H ₂ in gas mixt	0.7628	0.8452	0.8585	0.9010	0.9405
With H ₂ O content determined by OH and H ₂ O content after 1.001 sec.					
H ₂ O (l)	0.7865	0.8671	0.8607	0.8688	0.8866
H ₂ (g)	0.1713	0.1179	0.1232	0.1184	0.1068
O ₂ (g)	0.0421	0.0150	0.0162	0.0128	0.0066
H ₂ in gas mixt	0.8027	0.8870	0.8840	0.9021	0.9418

Table 3. Mole Fractions of Components
 $H/O = 2$, $P = 0.02 \text{ ATM}$, $T = 2125\text{K}$

Equilibrium Composition		
	H	0.00492
	H ₂	0.03700
	H ₂ O	0.92766
	OH	0.01319
	O	0.00159
	O ₂	0.01564
H ₂ O conserved		O-H conserved
H ₂ O (l)	0.93068	0.95020
H ₂ (g)	0.04621	0.03320
O ₂ (g)	0.02311	0.01660
Yield	0.047	0.038

FIGURE CAPTIONS

Fig. 1. Variation of the mole fractions of the components of stoichiometric ($H/O = 2$) mixtures. The initial composition is that of equilibrium H_2O at 3000K and 1 atm. The quench temperature is assumed to be constant and is 2000K; the pressure is 1 atm. The starred curves are the results of calculations which included HO_2 among the products. The unstarred curves are the results of the calculation which did not include HO_2 as a product. Although the presence of HO_2 is kinetically significant, it is present in very low concentrations. Its mole fraction has been multiplied by 1000 in this figure. The inclusion of HO_2 in the computation increases substantially the rate at which the fragments recombine to form H_2O during the first millise., which is, incidentally, about the same period of time that would be required for passage of the gas through a de Laval nozzle, although in the nozzle, the temperature and pressure would be continuously decreasing. In our subsequent calculations, we conducted the integration in two steps. The first covered the first millise.; the second covered the next second.


Fig. 2. Variation, with time, of the mole fractions of the components of a 2500K, 0.01 atm equilibrium mixture with H/O ratio equal to 2.2, when the temperature is instantly reduced to 800K; a, during the first millisecond; b, during the subsequent second. The equilibrium composition of such a mixture at 800K would consist only of H_2O (mole fraction 0.9091) and H_2 (mole fraction 0.0909). It is evident that there will be a substantial amount of unrecombined H_2 and O_2 in the mixture at 800K and, if the compo-

sition does not change much more as the mixture is also cooled and compressed to condense the H_2O , the remaining gas phase will be an explosive mixture of H_2 and O_2 , with H_2 mole fraction of about 0.90.


Fig. 3. Schematic diagram of the experimental apparatus.

Fig. 4. Schematic diagram of the reactor.


Fig. 5. Time history of the experimental variables and observations.

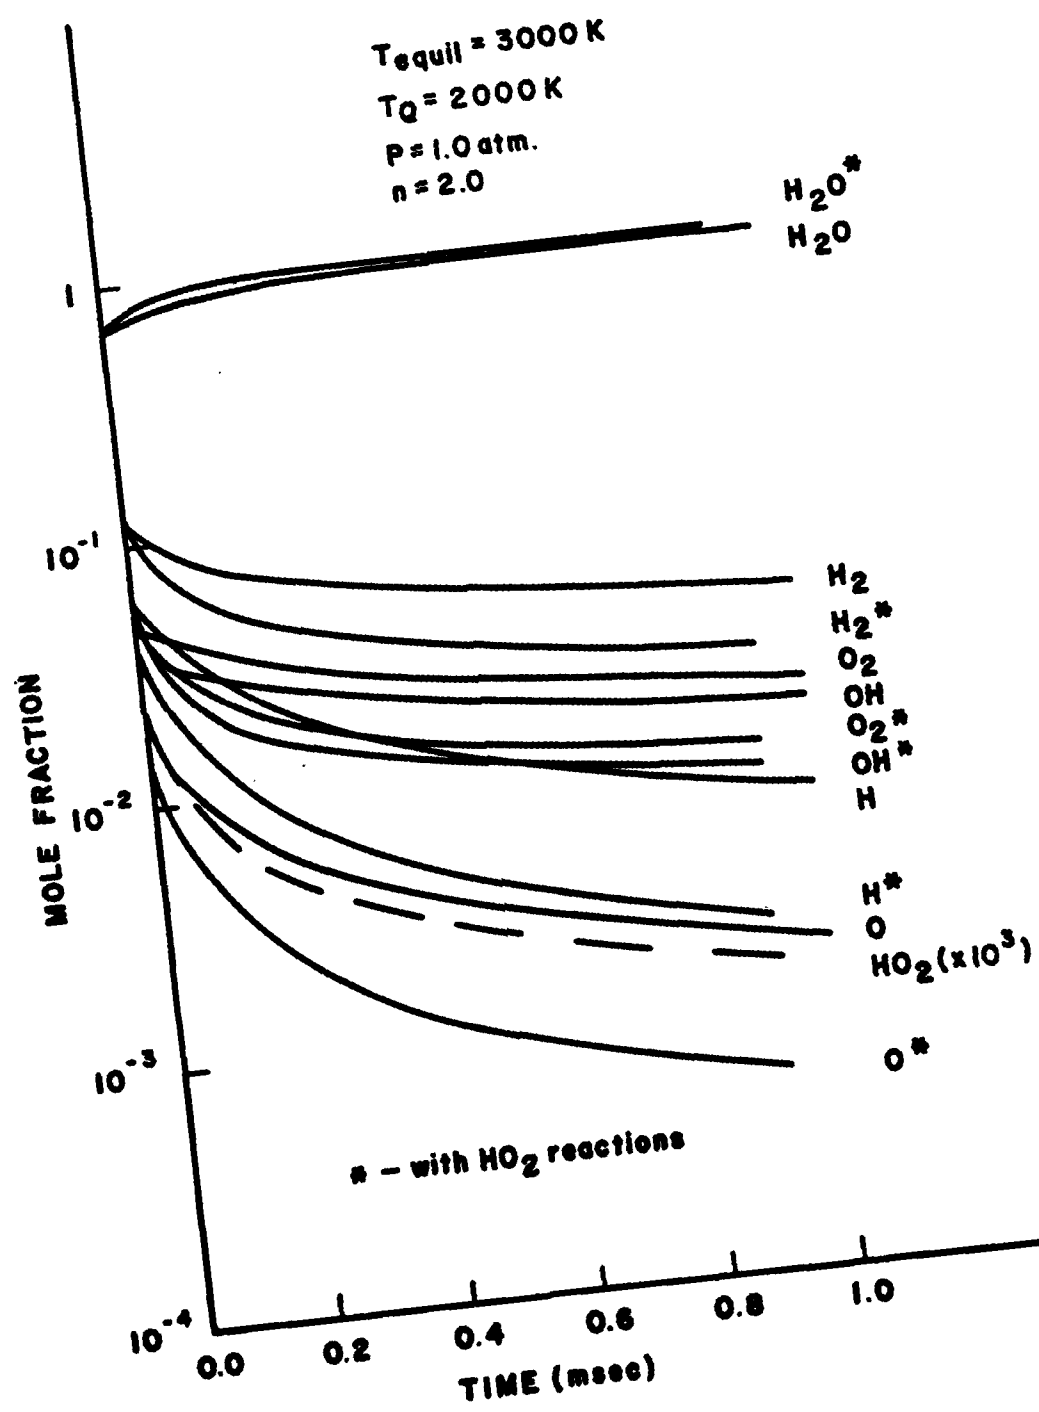


DIVER - Figure 1

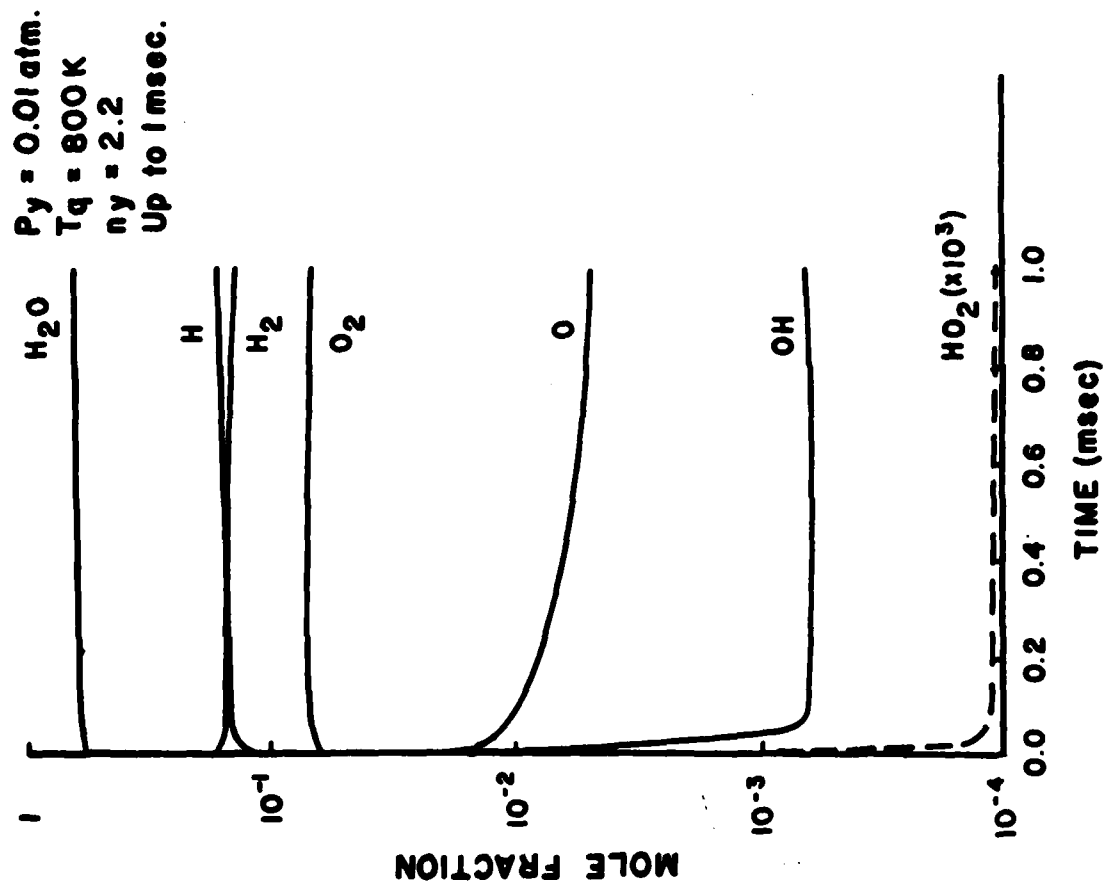

a

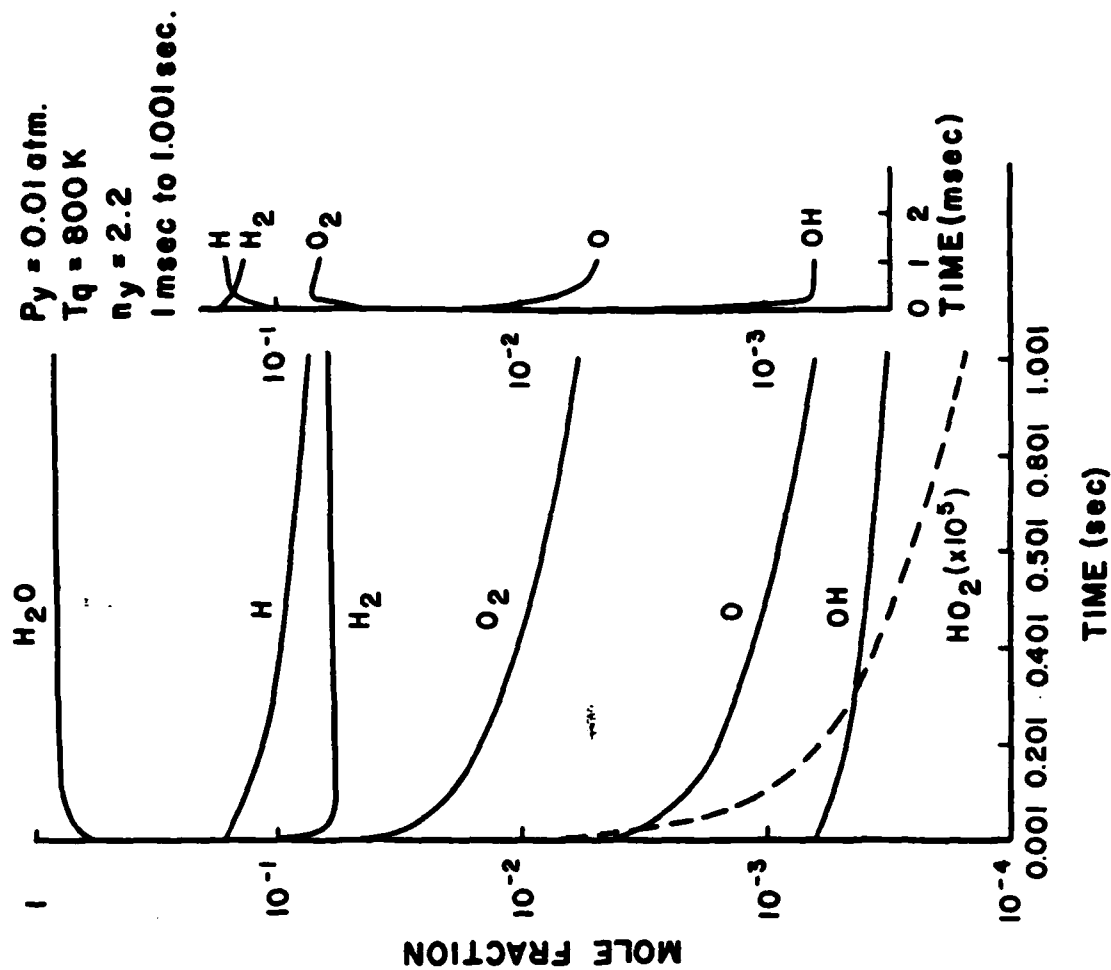


b

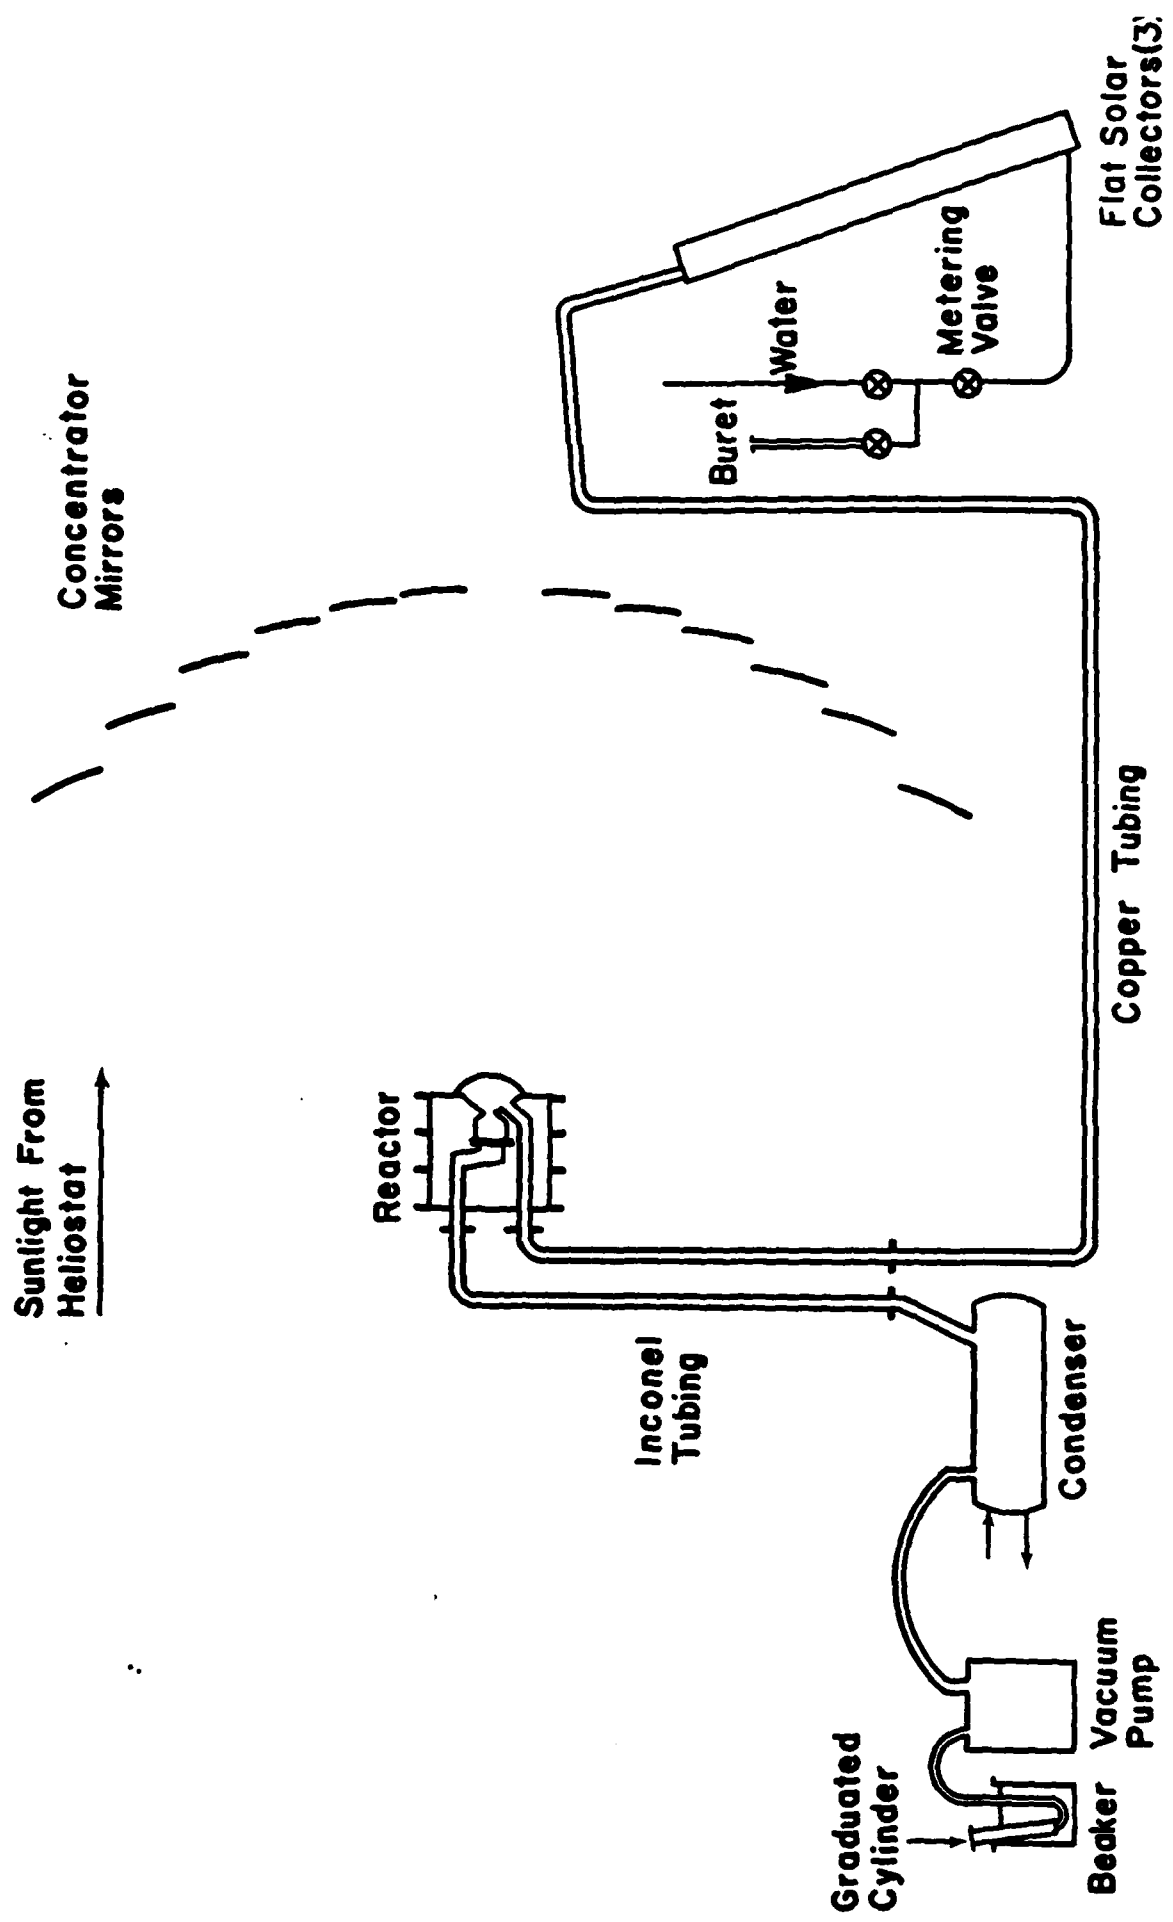

DIVER - Figure 3

7 December, 1982

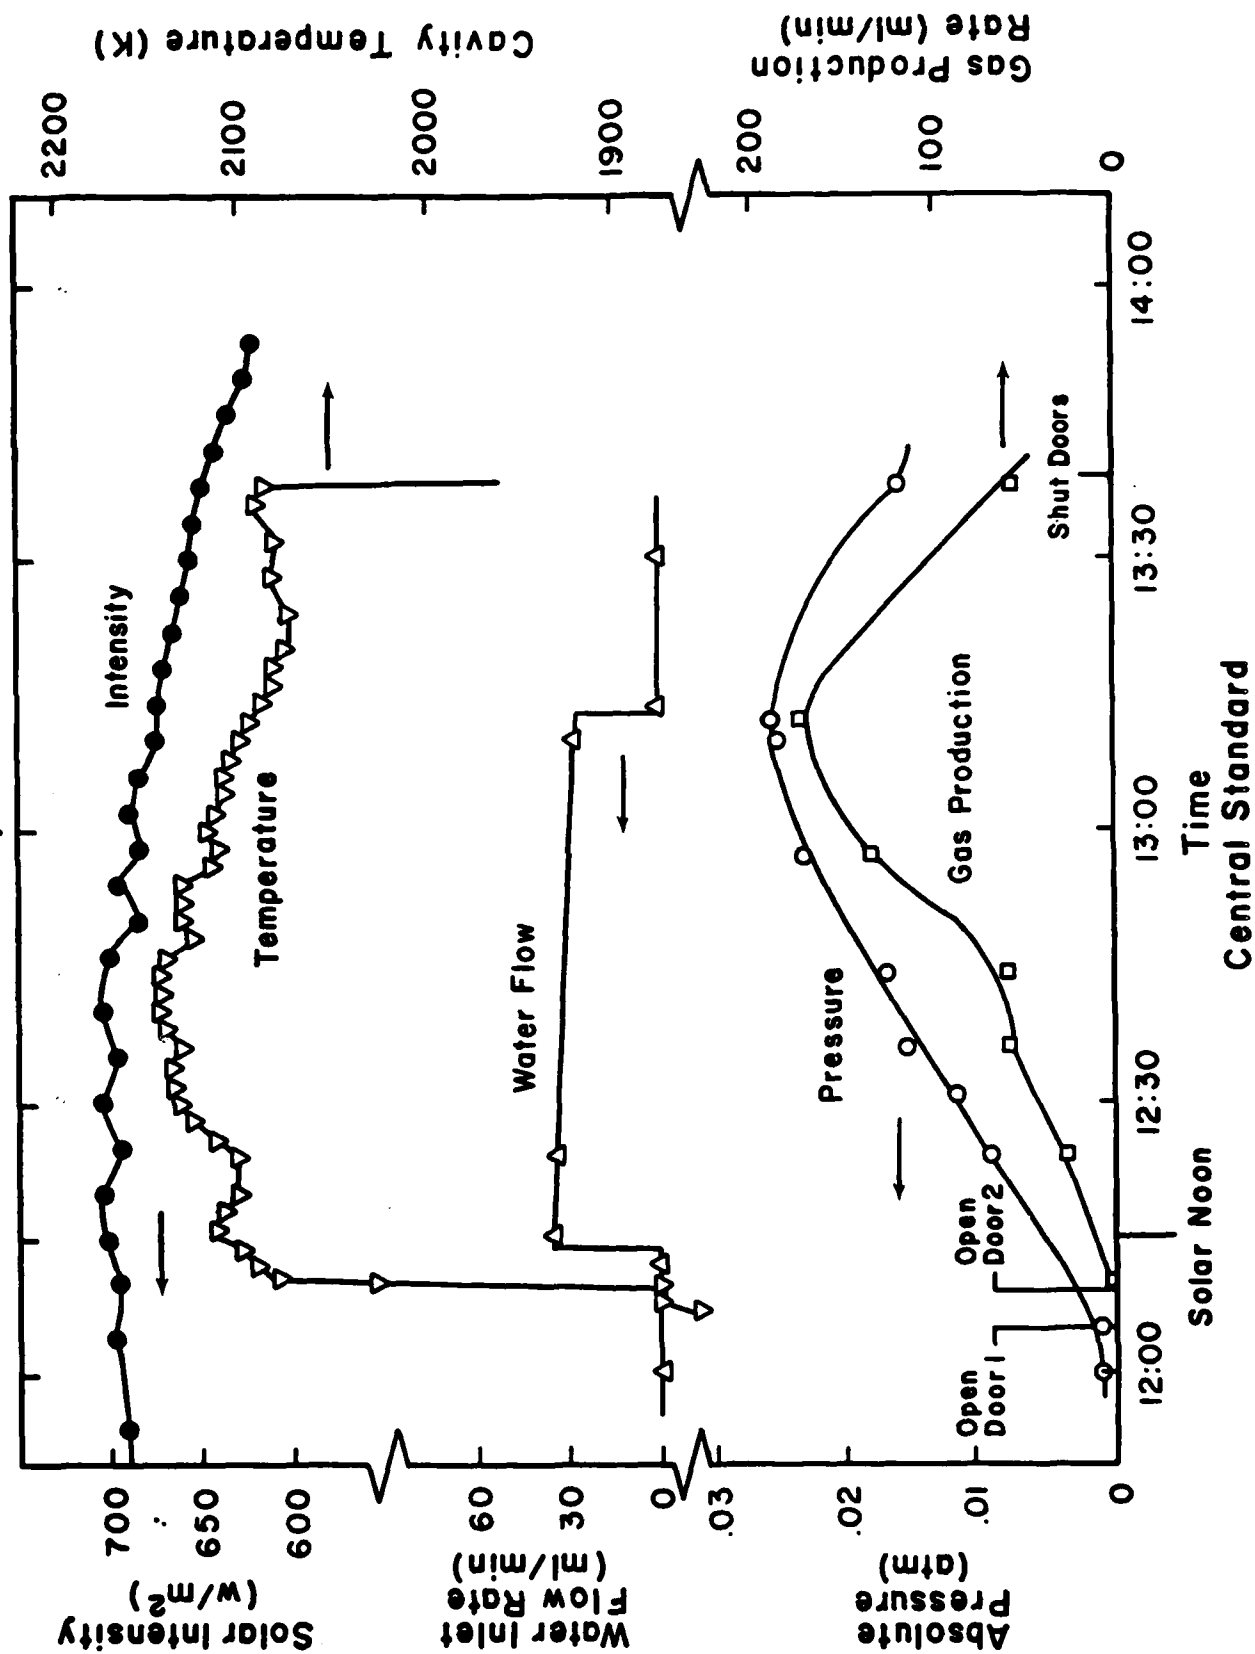

END

FILMED

5-83

DTIC